


Flowcrete

for the world at your feet

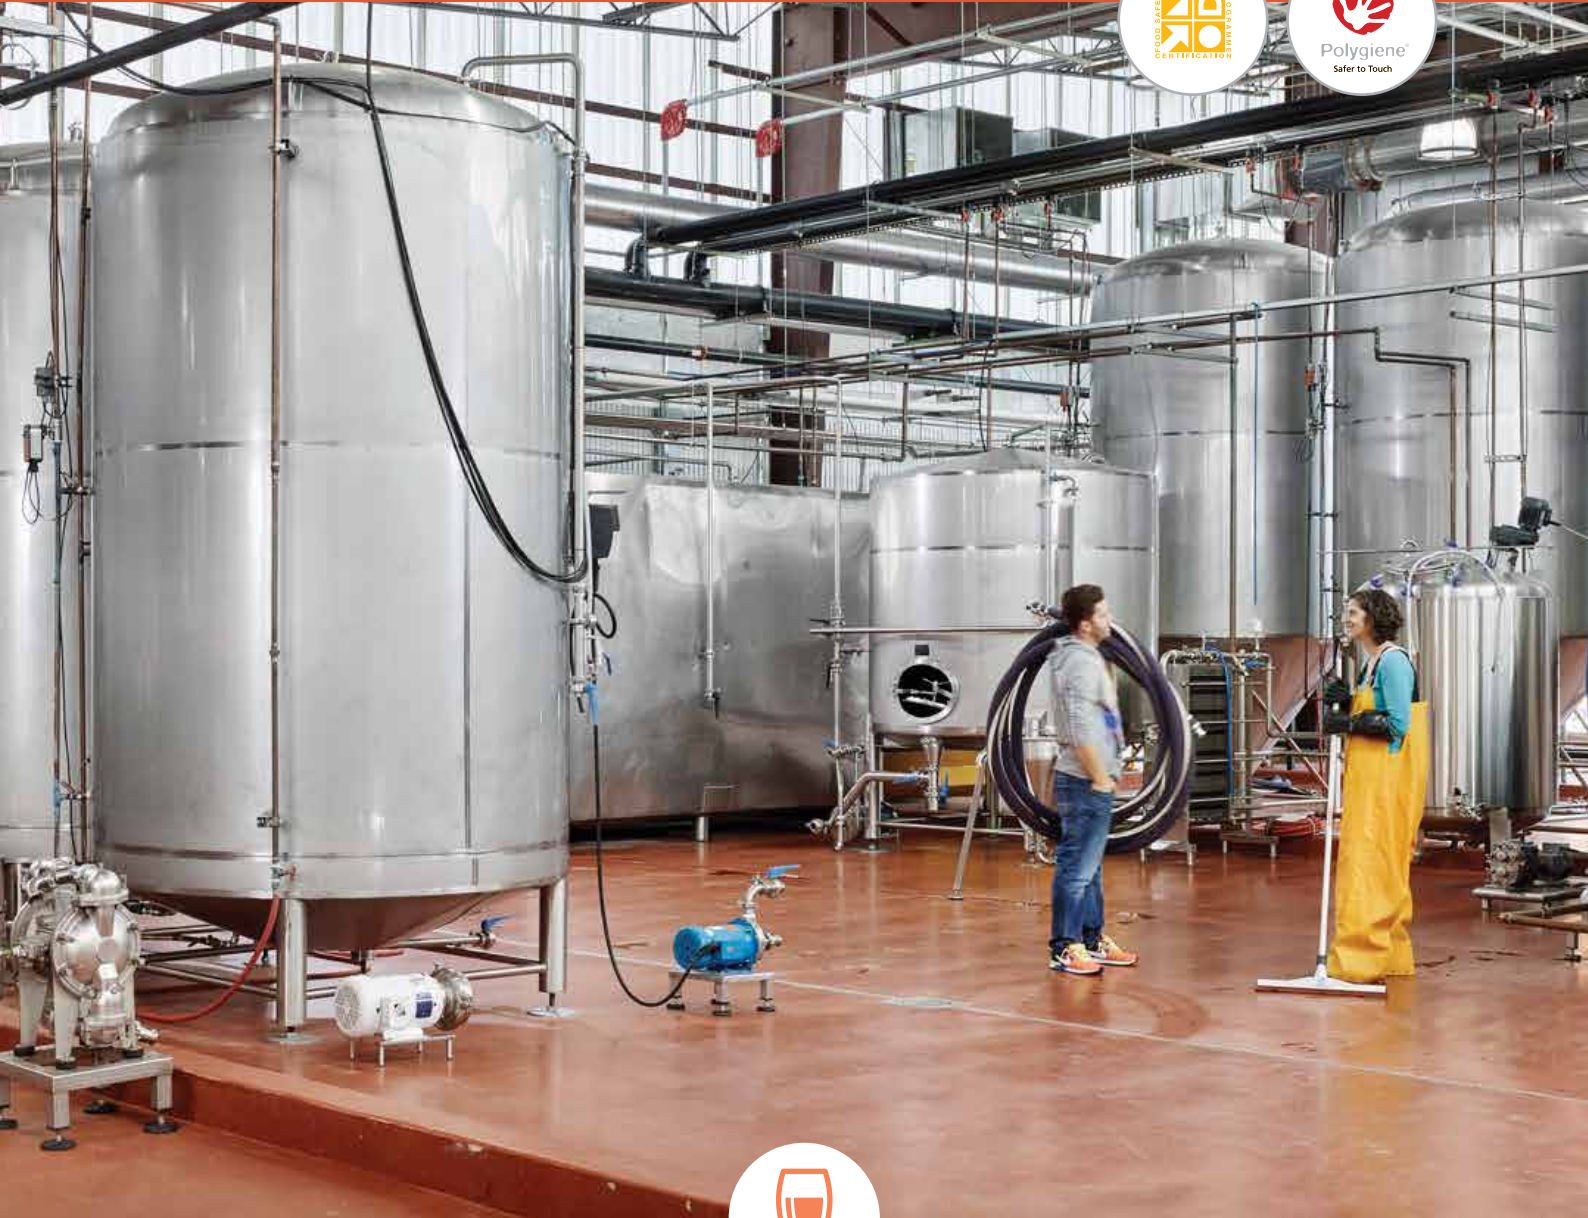

► Specialist resin and HACCP International certified antimicrobial treated floor coating systems designed to cater for...

BREWERIES


Welcome to Flowcrete UK

Chances are the next time you visit your local watering hole you'll encounter specialty polymer flooring systems throughout the facility rather than the typical tile or ceramic finishes traditionally found in these environments.


You'll find these systems not only behind the scenes, where the ale is brewing and being bottled, but also in tasting rooms where it is being enjoyed. Resin flooring systems are being used more often in these environments owing to their excellent performance attributes combined with design versatility.

Flowcrete UK offers a complete package of specialist resin and HACCP International certified antimicrobial treated floor coating systems designed to cater for all areas within the brewhouse.

Brewery Floor Plan

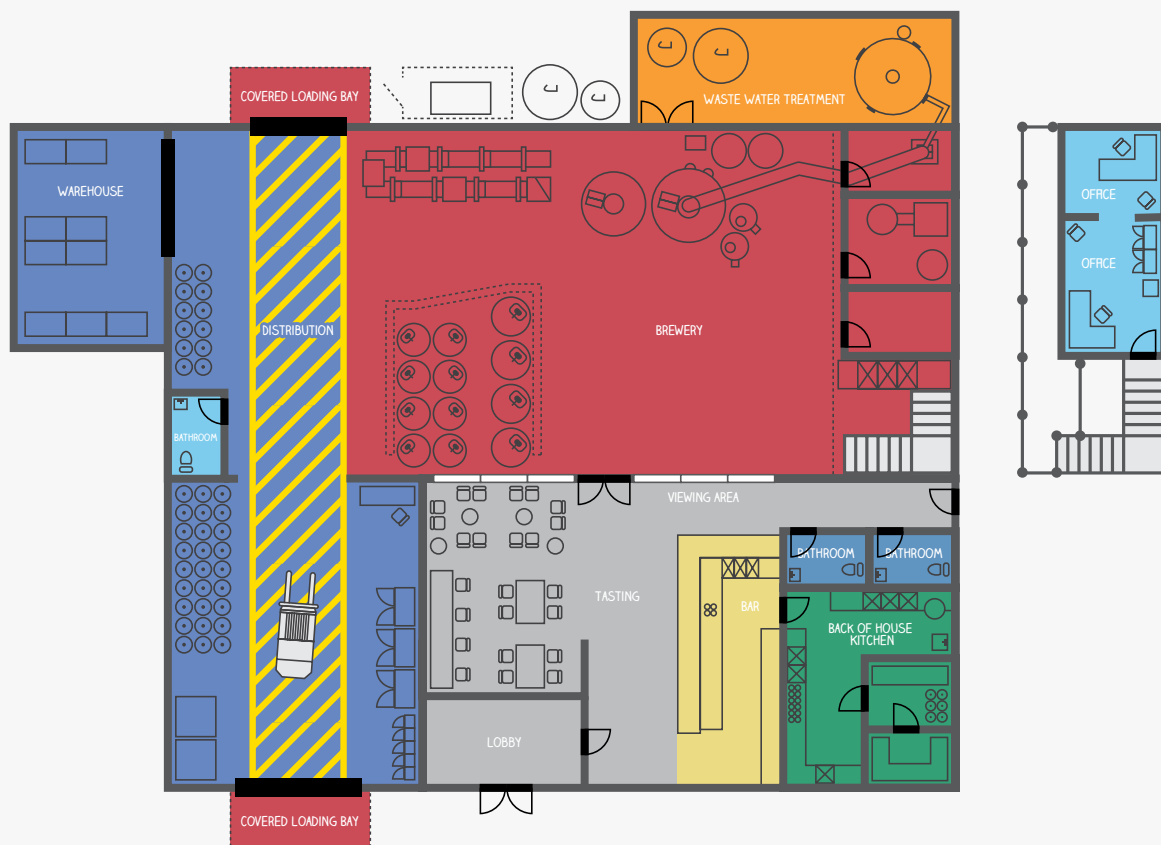

 Flowfresh HF	 Flowcoat SF41	 Peran Comfort	 Flowchem VE GL	 Deckshield ID
 Flowfresh MF	 Flowfresh MF	 Mondéco Mirrazzo	 Flowfast Quartz	

 For the application suitability of each system, look out for the check mark symbol throughout the brochure.



Polygiene® Antimicrobial Effectiveness



Salmonella Typhi	✓
MRSA	✓
Enterococcus Faecalis	✓
E-coli	✓
Staphylococcus Aureus	✓
Listeria	✓
Streptococcus Pyogenes	✓
C.difficile	✓
Pseudomonas Aeruginosa	✓
Proteus Vulgaris	✓
Campila Bacta	✓




HACCP International Certified Hygienic Flooring

Brewery floors are subject to spills and staining as well as heavy loads and foot traffic. Caustic chemicals, thermal shock, slip resistance and hygiene are also a concern.

Resin flooring systems ensure a non-porous, smooth and seamless surface where there is nowhere for bacteria or mold spores to grow.

Flowcrete UK's HACCP International certified and ISO 22196 compliant cementitious polyurethane flooring materials offer enhanced protection with the inclusion of Polygiene®, a silver-ion antimicrobial agent, designed to protect the surface from degradation caused by microbial growth.

How Does Polygiene® Work?

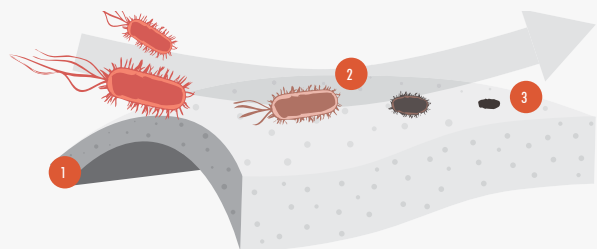

- 1 The silver ions are homogeneously distributed throughout the floor.
- 2 The silver ions migrate to the surface.
- 3 They protect the surface from degradation caused by microbial growth.

Flowfresh HF (6-9 mm)

Flowfresh HF is a trowel applied, heavy-duty and wear resistant antimicrobial treated polyurethane resin floor screed. It provides a durable, anti-slip finish, which is resistant to thermal shock, steam cleaning and moisture vapour transmission.

BREWERY

Standard Colours



Cream



Ochre



Red



Mustard



Mid Grey



Dark Green



Dark Grey



Dark Blue



TEMPERATURE RESISTANCE

Tolerant to intermittent spillages up to 120°C or sustained dry heat from -40°C to 105°C (at 9 mm thickness)

COEFFICIENT OF THERMAL EXPANSION

ASTM C531 3.74 x 10⁻⁵ mm/mm°C

SLIP RESISTANCE*

BS 7976-2 > 40 low slip potential



Flowfresh HF LT is available with improved fluidity at low temperatures (< 15°C). Please contact your local Flowcrete representative for further information. A full technical profile is available at www.flowcrete.co.uk

*in accordance with HSE & UKSRG guidelines

ISO 22196



Flowfresh MF (4-6 mm)

Flowfresh MF is a heavy duty, chemical resistant antimicrobial treated polyurethane resin floor finish. Ideal for zones subject to light-medium foot & wheeled traffic. These trowel applied systems deliver a seamless, joint free finish.

BAR / CATERING KITCHEN

Standard Colours



Cream



Ochre



Red



Mustard



Mid Grey



Dark Green



Dark Grey



Dark Blue

TEMPERATURE RESISTANCE

Tolerant to intermittent spillages up to 70°C or sustained heat from -20°C to 60°C

FIRE RESISTANCE

EN 13501-1

B_{FL} - s1

SLIP RESISTANCE*

BS 7976-2

> 40 low slip potential

*in accordance with HSE & UKSRG guidelines

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

Deckshield ID (2-3 mm)

Deckshield ID is a flexible, solvent free polyurethane coating system for distribution areas and loading bays. Deckshield ID cosmetically enhances and reduces noise, making distribution areas and loading bays brighter and safer environments.

DISTRIBUTION CENTRES

Standard Colours



Forest Green



Mid Grey



Mid Grey



Tile Red



Traffic Purple



Traffic Blue



SLIP/SKID RESISTANCE

EN 13036-4

Class I: >40 units wet tested
Class II: >40 units dry tested

TEMPERATURE RESISTANCE

Softens over 70°C, hardens on cooling

ABRASION RESISTANCE

EN ISO 5470-1

Weight loss < 3000 mg
using H22 wheel, 1000
cycles, load 1000g



Flowcoat SF41 (0.35 mm)

A high performance, solvent free, epoxy resin coating that can deliver an anti-slip profile. It is also hard wearing against sustained vehicle traffic, as well as chemical and abrasion resistant.

WAREHOUSES

Standard Colours



Light Grey
232



Beige
326



Goosewing Grey
222



Tile Red
637



Mid Grey
280



Forest Green
754



Dark Grey
281



Traffic Blue
466

SLIP RESISTANCE*

BS 7976-2

> 40 low slip potential

IMPACT RESISTANCE

EN ISO 6272

10 Nm

BOND STRENGTH

EN 13892-8

> 2.5 N/mm²

*in accordance with HSE & UKSRG guidelines

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

Flowfast Quartz & Classic for Wet Areas (5 mm)

Durable, fast curing MMA resin floor toppings made from decorative quartz granules in a clear resin binder. Delivers a slip and chemical resistant finish suited to environments subject to heavy foot traffic and aggressive cleaning agents.

BATHROOMS

Standard Industrial Colours



Red 301



Grey 704



Green 602



Cream 103



Blue 502



Yellow 104



TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 70 °C

FIRE RESISTANCE

EN 13501-1

B_{FL} - s1

SLIP RESISTANCE*

BS 7976-2

Dry >40 Low slip potential

Wet >40 Low slip potential

*in accordance with HSE & UKSRG guidelines




Mondéco Mirrazzo (6-7 mm)

A seamless, hardwearing, epoxy resin terrazzo floor finish. Containing crushed clear, coloured and mirrored glass alongside metallic particles, this system creates a glamorous finish underfoot.

VISITOR AREAS

Standard Colours



Botticino



Sapphire



Nephrite



Sodalite



Pearl Grey



Bardiglio



Haematite



Black Diamond

SLIP RESISTANCE*

BS 7976-2

Dry >40

Low slip potential

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 60 °C

IMPACT RESISTANCE

EN ISO 6272

4 Nm

*in accordance with HSE & UKSRG guidelines

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

Peran Comfort (2–3mm)

A matt, self-smoothing polyurethane resin floor finish. Ideal for areas with intensive pedestrian traffic in need of high performance contemporary finishes.

OFFICES

Standard Colours



Signal White



Pebble Grey



Light Grey



Oyster White



SLIP RESISTANCE*

EN 13036-4 / BS 7976-2	Dry 56 low slip potential Wet 26 moderate slip potential
------------------------	---

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 40°C

IMPACT RESISTANCE

EN ISO 6272	IR20
-------------	------

*in accordance with HSE & UKSRG guidelines



Flowchem VE GL (2–3 mm)

A hand or spray applied shrinkage compensated vinyl ester resin based glass fibre reinforced lining system with outstanding chemical, thermal and mechanical resistance.

WASTE WATER TREATMENT

Standard Colours



Green



Steel Grey



Charcoal



Light Grey

TEMPERATURE RESISTANCE

Tolerant up to 165°C

BARCOL HARDNESS

ASTM 2583	> 50
-----------	------

E-MODULUS


ASTM D-695	3.1 GPa
------------	---------

VOLUME SHRINKAGE

Rill 4 2.5.3.2.1	< 0.004 %
------------------	-----------

* Ranges provided to cover results from various resin types.

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

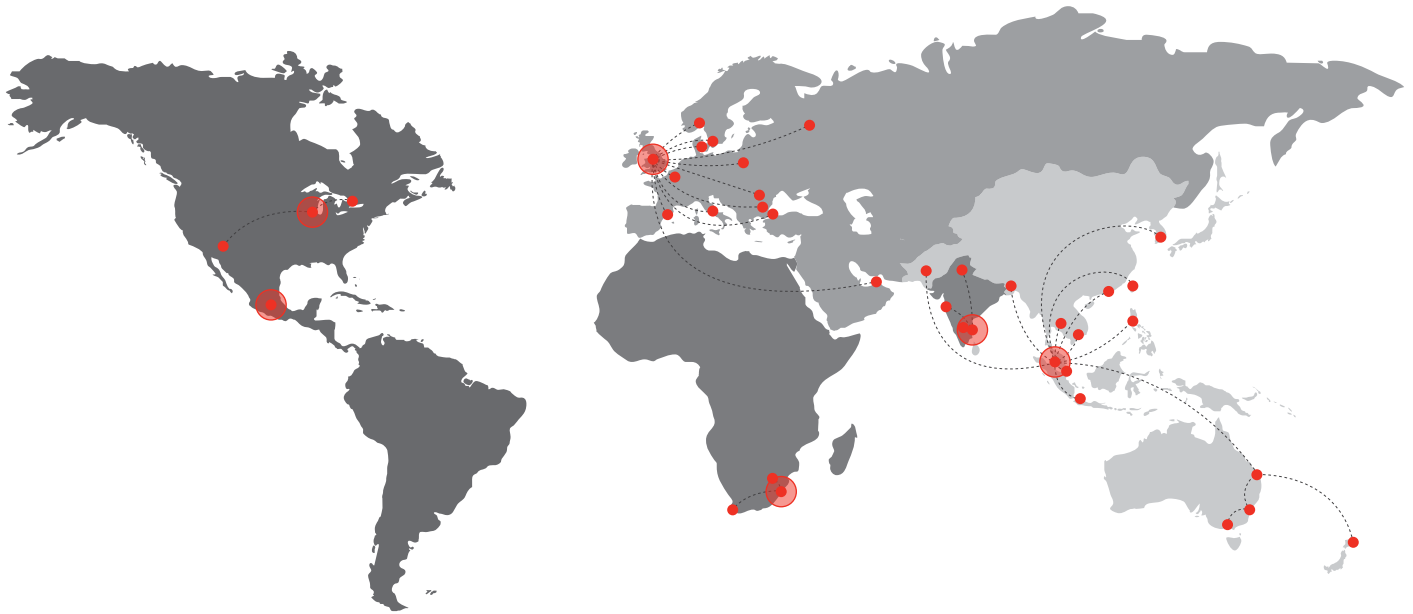

Flowcrete

World leader in seamless resin flooring solutions and other specialist coatings.

Africa

South Africa +27 31 701 0017 southafrica@flowcrete.com

Asia Pacific (APAC)

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+603 6277 9575	bangladesh@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Korea	+60 3 6277 9575	korea@flowcrete.com
Malaysia	+60 3 6277 9575	asia@flowcrete.com
New Zealand	+64 7 541 1221	newzealand@flowcrete.com
Pakistan	+60 3 6277 9575	pakistan@flowcrete.com
Philippines	+63 2 834 6506	philippines@flowcrete.com
Singapore	+65 6848 7166	singapore@flowcrete.com
Taiwan	+60 3 6277 9575	taiwan@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 28 6287 0846	vietnam@flowcrete.com

Europe & Middle East (EME)

Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 6486 0830	norway@flowcrete.com
Poland	+48 22 879 8907	poland@flowcrete.com
Romania	+40 766 596 991	romania@flowcrete.com
Russia	+7 916 931 3513	russia@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 212 2946570	turkey@flowcrete.com
UAE	+971 4 347 0460	uae@flowcrete.com
UK	+44 (0) 1942 251 400	flooringuk@cpg-europe.com

India

India +91 44 40176600 india@flowcrete.com

North America

Canada	+1 877-210-2444	canada@flowcrete.com
Mexico	+55 44 40 94 00	mexico@flowcrete.com
USA	+1 513-943-4225	americas@flowcrete.com