

## Flowcoat SK



High performance epoxy coating designed for aircraft hanger floors. Excellent chemical resistant epoxy resin coating, resistant to SKYDROL hydraulic fluids.



### Chemical Resistance:

Chemically resistant to SKYDROL hydraulic fluids



### Hard wearing:

High abrasion and impact resistance



### Easy to clean and maintenance:

Seamless and hygienic finish



### Grades of slip resistance:

Slip resistant finish can be tailored to specific client requirements

## Technical Information<sup>1</sup>

### REACTION TO FIRE

B<sub>n</sub>-s1 EN 13501-1

### SLIP RESISTANCE<sup>2</sup>

Dry > 40 EN 13036-4

### TEMPERATURE RESISTANCE

Tolerant up to +70°C

### WATER PERMEABILITY

Karsten test - Nil (Impermeable)

### SURFACE HARDNESS

> 250 N/mm<sup>2</sup> EN 13892-6

### WEAR RESISTANCE

RWA1 EN 13892-5

### COMPRESSIVE STRENGTH

> 80 N/mm<sup>2</sup> EN 13892-2

### FLEXURAL STRENGTH

> 60 N/mm<sup>2</sup> EN 13892-2

### TENSILE STRENGTH

> 15 N/mm<sup>2</sup> BS 6319

### BOND STRENGTH

> 2,0 MPa EN 13892-8

SPEED OF CURE	+10°C	+20°C	+30°C
Light Traffic	48 hrs	16 hrs	12 hrs
Full traffic	72 hrs	48 hrs	24 hrs
Full chemical cure	12 days	7 days	7 days

## Standard colour chart



The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local CPG Europe office.

<sup>1</sup>The figures in the table beside are typical properties achieved in laboratory tests – these results may vary depending on the conditions on the installation site. <sup>2</sup>The final anti-slip properties of the floor are influenced by the application method, the size and shape of the aggregate used for the topcoat (aggregate recommendations available from CPG Eastern Europe), the degree of abrasion, maintenance and the nature of the dirt.

## Model Specification

<b>System:</b>	Flowcoat SK
<b>Finish:</b>	Gloss
<b>Thickness:</b>	approx. 0,35–1,5 mm
<b>Colour:</b>	According to the catalog
<b>Producer:</b>	CPG Europe
<b>Supplier:</b>	Tremco CPG Poland Sp. z o.o.
<b>Telephone:</b>	+48 22 879 89 07

## Installation Service

The installation should be carried out by a Flowcrete approved contractors with a documented quality assurance scheme. Obtain details of our approved contractors by contacting CPG Eastern Europe or enquiring via our website at [www.flowcrete.com.pl](http://www.flowcrete.com.pl).

## Products Included in this System

<b>Primer (if weak substrate):<sup>3</sup></b>	Peran STC or Protop 1000
<b>First layer:</b>	Flowcoat SK; Natural quartz sand 0,2÷0,8 mm (optional)
<b>Second layer:</b>	Flowcoat SK

<sup>3</sup> If other resins are used contact CPG Eastern Europe for further details.

Detailed application instructions are available upon request.


## Aftercare – Cleaning and Maintenance

Clean regularly manually or using a machine in conjunction with a mildly alkaline detergent. Flowcrete Flooring Cleaning Instruction available upon request.

## Substrate Requirements

Concrete or screed substrate should be class min. C20/25, a minimum bond strength of 1,5 MPa (pull-off test), surface even, clean, free from laitance, dust and other contamination. All damages in the substrate should be repaired prior to applying the flooring. The substrate should be dry up to 75% RH as per BS 8204 (5% humidity measured by the Tramex method) and free from rising damp and ground water pressure. In case of higher humidity, one should use Hydraseal DPM as primer. Details to be found in the *Flowcrete Resin Flooring Substrate Requirements*.

## System Design

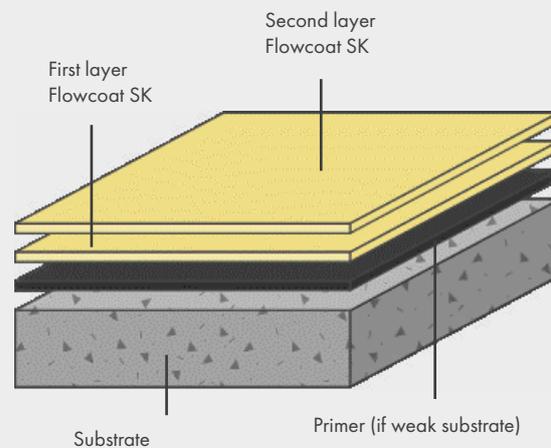

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless, impermeable surface with perfect adhesion to the substrate reduce the need for repairs and maintenance.

Technical information, recommendations and instructions concerning the product use, storage and maintenance included in this System Data Sheet are based on Tremco CPG Poland Sp. z o.o. (further related as „CPG Polska”) knowledge and experience, reflecting the best acknowledged way of using the material for a given moment. Taking into consideration other factors that are beyond the producer’s control, including differences in quality of substrates, tools and other complementary materials, weather conditions, proper installation and also cleaning and maintenance, CPG Polska cannot take responsibility in case of failure to conform with information and instructions included in this System Data Sheet or, respectively, written recommendations from authorized CPG Polska representatives. One should always conform with up-to-date norms and building principles, and also safety, hygiene and health protection rules according to the information included in Material Safety Data Sheets and also on the products packaging. This System Data Sheet replaces all previous versions. In order to receive up-to-date System Data Sheets contact CPG Polska.

25/05/21

CPG Eastern Europe  
ul. Marywilska 34, 03-228 Warsaw, Poland  
tel.: +48 22 879 8907  
email: [poland@cpg-europe.com](mailto:poland@cpg-europe.com)

 **Construction  
Products Group**  
Europe

[www.flowcrete.com.pl](http://www.flowcrete.com.pl)