


Flowchem VE ESD RC

CE
13
PN-EN 13813

An anti-static roller coat shrinkage compensated vinyl ester resin based coating with excellent chemical and mechanical resistance.

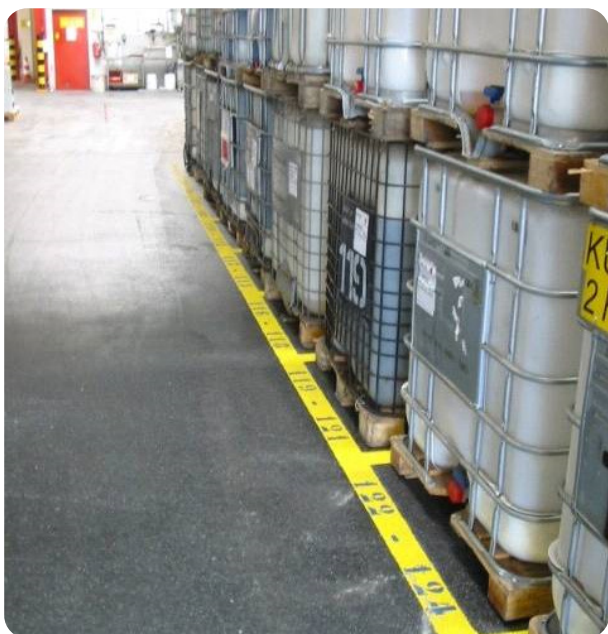

Temperature Resistant:

Resistant to intermittent temperatures up to +145°C



Anti-static properties:

Meets BS 2050 requirements



Resistant to Chemicals:

Protects against a variety of aggressive acids, solvents and alkalis



Fast Cure:

Accelerated curing time, providing an operational surface in just 12 hours

Technical Profile¹

TEMPERATURE RESISTANCE	
Tolerant up to +145 °C	ASTM D 648-56
VOLUME SHRINKAGE	
< 0,004 %	RILL 4 2.5.3.2.1
BARCOL HARDNESS	
> 40	ASTM 2583
E-MODULUS	
3,1 GPa	ASTM D-695
COMPRESSIVE STRENGTH	
125 MPa	ASTM D-790
FLEXURAL STRENGTH	
73 MPa	ASTM D-638
ADHESION	
> 4 MPa (Substrate failure)	
ANTISTATIC PROPERTIES:	
0,5-1 MOhm	BS 2050
SPEED OF CURE ²	
Light Traffic	+20 °C 12 h
Full Traffic	24 h
Full Chemical Cure	72 h

Standard colour chart



Black

The applied colours may differ from the examples shown.
For a full colour chart and samples, contact your local Flowcrete office.

¹ The figures in the table beside are typical properties achieved in laboratory tests – these results may vary depending on the conditions on the installation site.
² Cure times can be changed by altering the quantity of accelerator.

Model Specification

Model Specification	Flowchem VE ESD RC
Finish	Satin
Thickness	0,3–1,5 mm
Colour	Black
Producer:	Flowcrete Group Ltd
Supplier:	Flowcrete Polska Sp. z o.o.
Telephone:	+48 22 879 89 07

Installation Service

The installation should be carried out by a Flowcrete approved contractors with a documented quality assurance scheme. Obtain details of our approved contractors by contacting Flowcrete Polska or enquiring via our website at www.flowcrete.com.pl.

Products Included in this System

Primer:	Flowchem VE Primer; Peran Copperstrip
Conductive layer:	Flowchem VE ESD Primer
Main layer:	Flowchem VE ESD RC


Aftercare – Cleaning and Maintenance

Clean regularly manually or using a machine in conjunction with a mildly alkaline detergent. Flowcrete Flooring Cleaning Instruction available upon request.

Substrate Requirements

Concrete or screed substrate should be class min. C20/25, a minimum bond strength of 1,5 MPa (pull-off test), surface even, clean, free from laitance, dust and other contamination. All damages in the substrate should be repaired prior to applying the flooring. The substrate should be dry up to 75% RH as per BS 8204 (5% humidity measured by the Tramex method) and free from rising damp and ground water pressure. In case of higher humidity, one should use combination of Flowfresh Primer and Hydraseal DPM as primer. Details to be found in the *Flowcrete Resin Flooring Substrate Requirements*.

System Design

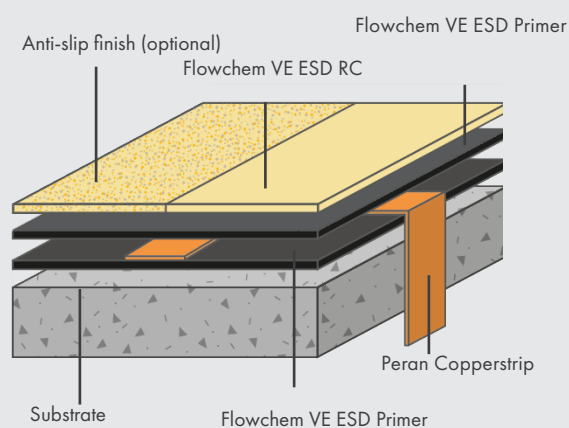

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless, impermeable surface with perfect adhesion to the substrate reduce the need for repairs and maintenance.

Technical information, recommendations and instructions concerning the product use, storage and maintenance included in this System Data Sheet are based on Flowcrete Polska Sp. z o.o. (further related as „Flowcrete”) knowledge and experience, reflecting the best acknowledged way of using the material for a given moment. Taking into consideration other factors that are beyond the producer’s control, including differences in quality of substrates, tools and other complementary materials, weather conditions, proper installation and also cleaning and maintenance, Flowcrete cannot take responsibility in case of failure to conform with information and instructions included in this System Data Sheet or, respectively, written recommendations from authorized Flowcrete representatives. One should always conform with up-to-date norms and building principles, and also safety, hygiene and health protection rules according to the information included in Material Safety Data Sheets and also on the products packaging. This System Data Sheet replaces all previous versions. In order to receive up-to-date System Data Sheets contact Flowcrete Polska

14/05/20

Flowcrete Central & Eastern Europe
ul. Marywilska 34, 03-228 Warsaw, Poland
tel.: +48 22 879 8907, fax: +48 22 879 8918
email: poland@flowcrete.com

www.flowcrete.com.pl