



ISOCRETE SELF LEVEL SCREEDS

- ▶ A range of Self Leveling Floor Grouts & Screeds designed to deliver the necessary strength required to install a quality floor finish.

Isocrete Self Level Floor Screeds

Flowcrete UK's range of Isocrete Self Levelling Screeds offer numerous advantages for use in both new build and refurbishment projects.

Not only do they meet BS 8204-7 standards, they are also more robust in multi-use application depths, less sensitive to elevated application temperatures and offer an improved dimensional stability/shrinkage profile.

What's more, these applicator friendly formulations can be laid at reduced thickness's compared to semi-dry screeds, delivering reduced shrinkage, superior compressive strengths and impressive thermal conductivity in conjunction with underfloor heating.

Benefits



Meet BS 8204-7 criteria



Flowable & self-smoothing



High compressive strength at a reduced thickness



Can be used in conjunction with the majority of floor finishes



Can be laid at a reduced thickness



Lower tendency to split/separate on over watering



Easy & quick to apply



Faster drying times & reduced shrinkage



Good thermal conductivity with underfloor heating

Application Suitability



Healthcare



Education



Leisure



Residential



Retail



Airports



Transport



Industrial



FM 569508 EMS 569510



N55Plus





Flowcrete's Commitment to Sustainability

Flowcrete UK has attained the ISO 14001:2015 environmental management system certification thanks to its dedication to sustainable, environmentally friendly working practises.

The ISO 14001:2015 policy sets the best practise benchmark for a long list of sustainable processes, including reducing a company's carbon footprint, improving recycling, reducing packaging, minimising waste and improving efficiencies on finite natural resources.

The demanding standard requires Flowcrete UK to ensure the environmental integrity of its operations at all times by adhering to the four principles of:

Prevention: Protecting the environment through the prevention of pollution and reduction of waste.

Compliance: Guaranteeing compliance with environmental laws, regulations and emissions monitoring.

Communication and Training: A commitment that employees will be educated and environmental objectives communicated to all members of staff.

Continuous Improvement: Regularly reviewing daily activity and always being on the look out for new opportunities to evolve adherence to these four principles.

Technical Profile*

REACTION TO FIRE		
EN 13501-1	E	
IMPACT RESISTANCE		
BS 8204-1 Category A		
COMPRESSIVE STRENGTH (28 DAYS)		
EN 13892-2	33 N/mm ²	C30
FLEXURAL STRENGTH (28 DAYS)		
EN 13892-2	8 N/mm ²	F8
ADHESION TO C30 CONCRETE (28 DAYS)		
>1 N/mm ²		
LAYING TEMPERATURE		
5–25°C		

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Isocrete 1500 (0–20 mm)

A fast drying underlayment for all-purpose and easy levelling of concrete floors prior to application of floor coverings.

Isocrete 1500 has been designed for fast track refurbishment and new construction where floor finishes need to be applied quickly.



Foot traffic in 2–4 hours & ready to cover after 24 hours



Hand or pump applied



Areas of heavy traffic

Isocrete 4000 (0–50 mm)

A hand applied, self levelling, single component quick hardening screed for levelling and smoothing floors where fast drying is essential.

Isocrete 4000 is typically used for filling holes or depressions, for fast track refurbishment and new construction.



Foot traffic in 2 hours & ready to cover after 4 hours



Hand applied



Areas of medium to heavy traffic

Technical Profile*

REACTION TO FIRE		
EN 13501-1	E	
IMPACT RESISTANCE		
BS 8204-1 Category A		
COMPRESSIVE STRENGTH (28 DAYS)		
EN 13892-2	30 N/mm ²	C30
FLEXURAL STRENGTH (28 DAYS)		
EN 13892-2	7 N/mm ²	F7
ADHESION TO C30 CONCRETE (28 DAYS)		
>1 N/mm ²		
LAYING TEMPERATURE		
5–25°C		

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Technical Profile*

REACTION TO FIRE		
EN 13501-1	E	
IMPACT RESISTANCE		
BS 8204-1 Category A		
THERMAL RESISTANCE		
Up to 50°C		
COMPRESSIVE STRENGTH (28 DAYS)		
EN 13892-2	20 N/mm ²	C20
FLEXURAL STRENGTH (28 DAYS)		
EN 13892-2	6 N/mm ²	F6
ADHESION TO C30 CONCRETE (28 DAYS)		
> 1 N/mm ²		
LAYING TEMPERATURE		
5–25°C		

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Isocrete 5000 (3–50 mm)

A hand applied, single component screed for levelling concrete floors, patching existing screeds and filling holes in a base where fast drying is essential.

Isocrete 5000 can be used for fast track refurbishment and new construction.



Hand applied



Foot traffic in 2–4 hours & ready to cover after 4 hours



Areas of medium to heavy traffic

Isocrete SL Base (3–50 mm)

A fast drying, self levelling screed for easy levelling of concrete floors before installation.

Isocrete SL Base can be used as levelling layer underneath Isocrete 1500, SL Plus or bonded Isocrete SL Renovation, or can be used on its own to level the concrete base.



Foot traffic in 2–4 hours & ready to cover after 1–3 days



Hand or pump applied



Areas of heavy traffic

Technical Profile*

REACTION TO FIRE		
EN 13501-1	E	
IMPACT RESISTANCE		
BS 8204-1 Category A		
THERMAL RESISTANCE		
Up to 50°C		
COMPRESSIVE STRENGTH (28 DAYS)		
EN 13892-2	25 N/mm ²	C25
FLEXURAL STRENGTH (28 DAYS)		
EN 13892-2	6 N/mm ²	F6
ADHESION TO C30 CONCRETE (28 DAYS)		
> 1 N/mm ²		
LAYING TEMPERATURE		
5–25°C		

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Technical Profile*

REACTION TO FIRE		
EN 13501-1	E	
IMPACT RESISTANCE		
BS 8204-1 Category A		
THERMAL RESISTANCE		
Up to 50°C		
COMPRESSIVE STRENGTH (28 DAYS)		
EN 13892-2	30 N/mm ²	C30
FLEXURAL STRENGTH (28 DAYS)		
EN 13892-2	7 N/mm ²	F7
ADHESION TO C30 CONCRETE (28 DAYS)		
>1 N/mm ²		
LAYING TEMPERATURE		
5–30°C		

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Isocrete SL Plus (3–30 mm)

A fast drying, pump applied, cement-based underlayment for levelling of concrete floors before the installation of floor coverings.

Isocrete SL Plus is suitable as a temporary work surface for following trades prior to the final floor finish being applied.



Areas of heavy traffic



Pump applied



Foot traffic in 2–4 hours & ready to cover after 24 hours

Isocrete SL Renovation

(5–50 mm)

A fast drying, pump applied, fibre reinforced underlayment for fast track renovation of existing floors prior to application of floor coverings.

Isocrete SL Renovation can be laid over existing floor finishes such as tiles and laid flooring including with Underfloor Heating at 25mm cover.



Areas of heavy traffic



Suitable with underfloor heating



Ready to cover in 2 days

Technical Profile*

REACTION TO FIRE		
EN 13501-1	E	
IMPACT RESISTANCE		
BS 8204-1 Category A		
THERMAL RESISTANCE		
Up to 50°C		
COMPRESSIVE STRENGTH (28 DAYS)		
EN 13892-2	33 N/mm ²	C30
FLEXURAL STRENGTH (28 DAYS)		
EN 13892-2	8 N/mm ²	F8
ADHESION TO C30 CONCRETE (28 DAYS)		
>1 N/mm ²		
LAYING TEMPERATURE		
5–25°C		

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Technical Profile*

REACTION TO FIRE		
EN 13501-1	E	
IMPACT RESISTANCE		
BS 8204-1 Category A		
THERMAL RESISTANCE		
Up to 50°C		
COMPRESSIVE STRENGTH (28 DAYS)		
EN 13892-2	33 N/mm ²	F35
FLEXURAL STRENGTH (28 DAYS)		
EN 13892-2	8 N/mm ²	F9
ADHESION TO C30 CONCRETE (28 DAYS)		
> 1 N/mm ²		
LAYING TEMPERATURE		
5–25°C		

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Flowscreed Industrial Top (5–30 mm)

A fast drying cement-based, pump applied floor topping for fast track renovation of concrete floors.

Flowscreed Industrial Top can be used with resin toppings to provide better aesthetics and improved wear and chemical resistance.



Areas of heavy traffic



Pump applied



Foot traffic in 2–4 hours & ready to cover after 24 hours

Flowcem (2–3 mm)

A three component, technically advanced, epoxy modified cementitious, self-smoothing screed.

Flowcem is designed to level new concrete and screeds up to 100% RH and allow the early installation of moisture sensitive finishes.



Foot traffic in 16 hours & ready to cover after 2 days



Hand applied



Includes damp proof membrane




Areas of medium to heavy traffic

Technical Profile*

WATER PERMEABILITY	
Karsten test	Nil (impermeable)
BOND STRENGTH	
EN 13892-8	2.5 N/mm ²
TEMPERATURE RESISTANCE	
Tolerant up to 50°C	
COMPRESSIVE STRENGTH	
EN 13892-2	60 N/mm ²
TOXICITY	
Taint free to sensitive foodstuffs.	
ADHESION TO C30 CONCRETE	
> 1 MPa	

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

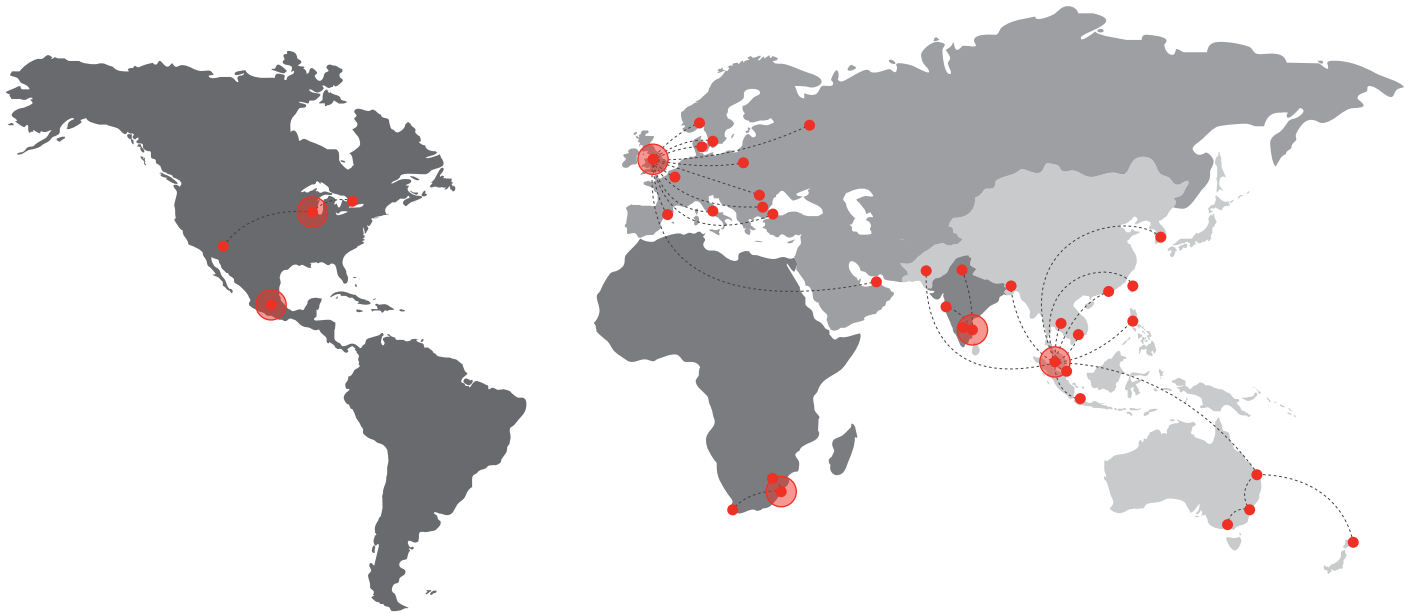

Flowcrete

World leader in seamless resin flooring solutions and other specialist coatings.

Africa

South Africa +27 31 701 0017 southafrica@flowcrete.com

Asia Pacific (APAC)

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+603 6277 9575	bangladesh@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Korea	+60 3 6277 9575	korea@flowcrete.com
Malaysia	+60 3 6277 9575	asia@flowcrete.com
New Zealand	+64 7 541 1221	newzealand@flowcrete.com
Pakistan	+60 3 6277 9575	pakistan@flowcrete.com
Philippines	+63 2 834 6506	philippines@flowcrete.com
Singapore	+65 6848 7166	singapore@flowcrete.com
Taiwan	+60 3 6277 9575	taiwan@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 28 6287 0846	vietnam@flowcrete.com

Europe & Middle East (EME)

Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 6486 0830	norway@flowcrete.com
Poland	+48 22 879 8907	poland@flowcrete.com
Romania	+40 766 596 991	romania@flowcrete.com
Russia	+7 916 931 3513	russia@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 212 2946570	turkey@flowcrete.com
UAE	+971 4 347 0460	uae@flowcrete.com
UK	+44 (0) 1270 753 000	uk@flowcrete.com

India

India +91 44 40176600 india@flowcrete.com

North America

Canada	+1 877-210-2444	canada@flowcrete.com
Mexico	+55 44 40 94 00	mexico@flowcrete.com
USA	+1 513-943-4225	americas@flowcrete.com